


J5640P98-20W

Drawing

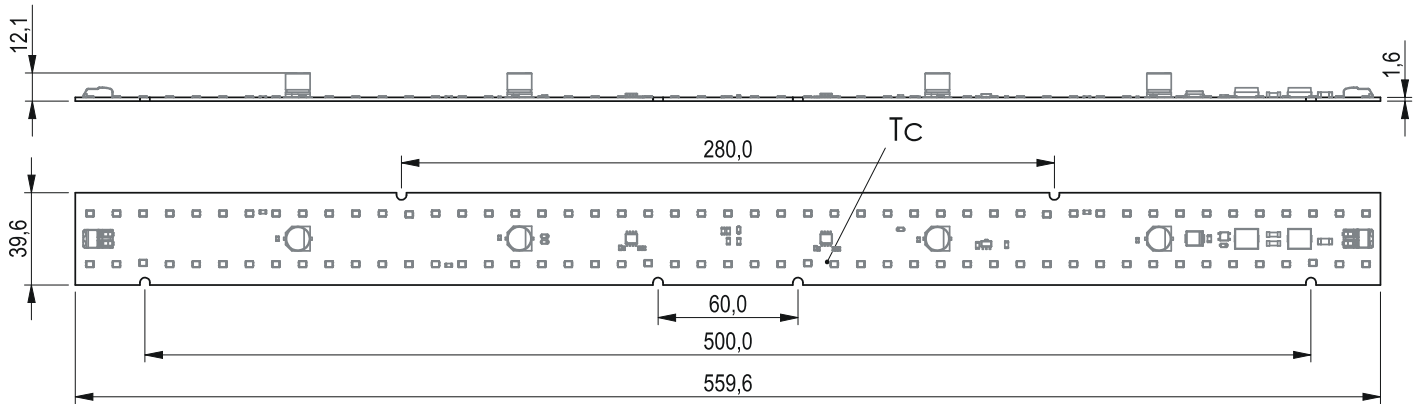

Technical specifications

Nominal voltage	230 V
Power factor	>0,99
Ambient temperature range	-25 ... +45 °C
tc	85 °C
tp rated	55 °C
Lumen maintenance L80B10	60000h
Lumen maintenance L70B50	>72000h
Insulation	Basic
Insulation test voltage	1500 V
Classification acc. to IEC 62031	Built-in
Risk group (IEC 62471)	RG1
Type of protection	IP00
Beam characteristic	120 °
Surge protection L-N	2 kV
SVM	<0,9
P _{st} LM	<1

Product details

- Driver on board
- Reduced flicker
- Compact slim design
- Non dimmable
- Dimension according to L56W4

Product code	Photometric code	Useful luminous flux at tp=25 °C	Expected luminous flux at tp rated	Power consumption	Efficacy at tp=25 °C	Expected efficacy at tp rated	Energy classification
J5640P98-830-20W	830/359	2800 lm	2750 lm	20 W	140,0 lm/W	137,5 lm/W	D
J5640P98-840-20W	840/359	2850 lm	2800 lm	20 W	142,5 lm/W	140,0 lm/W	D
J5640P98-850-20W	850/359	2950 lm	2900 lm	20 W	147,5 lm/W	145,0 lm/W	D
J5640P98-857-20W	857/359	2900 lm	2850 lm	20 W	145,0 lm/W	142,5 lm/W	D
J5640P98-865-20W	865/359	2850 lm	2800 lm	20 W	142,5 lm/W	140,0 lm/W	D

J5640P98-20W

Thermal details

Temperature has a great influence on the lifetime of LED products. Exceeding the permissible temperatures can significantly shorten the life of the module or even lead to its destruction. It is necessary to verify compliance with the maximum allowable temperature at the reference point under stable operating conditions. The maximum value should be determined based on the application-specific worst-case conditions. Both reference point temperatures (t_c and t_p) are measured at the same location.

Instalation

The LED modules are designed for direct mains operation (230 V AC). Installation must be carried out under observation country specific relevant safety regulations and standards. The module is suitable for luminaires of protection class I, grounding is mandatory to comply with safety standards. In case of applications in luminaires of protection class II the safety regulations acc. to luminaire safety standards must be observed. An additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed. This is typically achieved by means of a non removable light distributor over the module or by a suitable luminaire construction.

Risk of sulfurization


The LED uses a silver-plated lead frame and its surface color may change to black (or dark colored) when it is exposed to sulfur (S), chlorine (Cl) or other halogen compound. Sulfurization of lead frame may cause intensity degradation, change of chromaticity coordinates and, in extreme cases, open circuit. It requires caution. Due to possible sulfurization of lead frame, the LED Modules should not be used and stored together with oxidizing substances made of materials such as rubber, plain paper, lead solder cream, etc.

Dimming

Dimmable with phase cutting leading- and trailing-edge dimmer. Due to the used electronic parts on the module not all available phase-cutting dimmers are compatible. Minimum dimmer load has to be observed. The compatibility of the dimmer and the modules has to be confirmed prior to installation to avoid flickering.

Wiring

The wiring can be in stranded wires or solid with a cross section of 0.2 to 0.75mm².

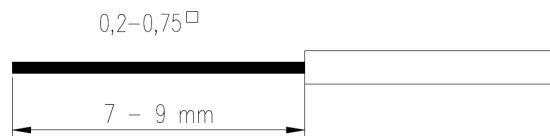

Photometric code

1 digit	2+3 digit	4 digit	5 digit	6 digit
CRI	Colour temperature in Kelvin x 100	MacAdam initial	Mac Adam after 25 % of the lifetime (max. 6000 h)	Luminous flux after 25% of the lifetime (max. 6000 h)
7 70-79				7 ≥ 70
8 80-89				8 ≥ 80
9 ≥90				9 ≥ 90