


# PLIN2 280x20mm CRI80 2000lm 225mA 4C U5

## Drawing

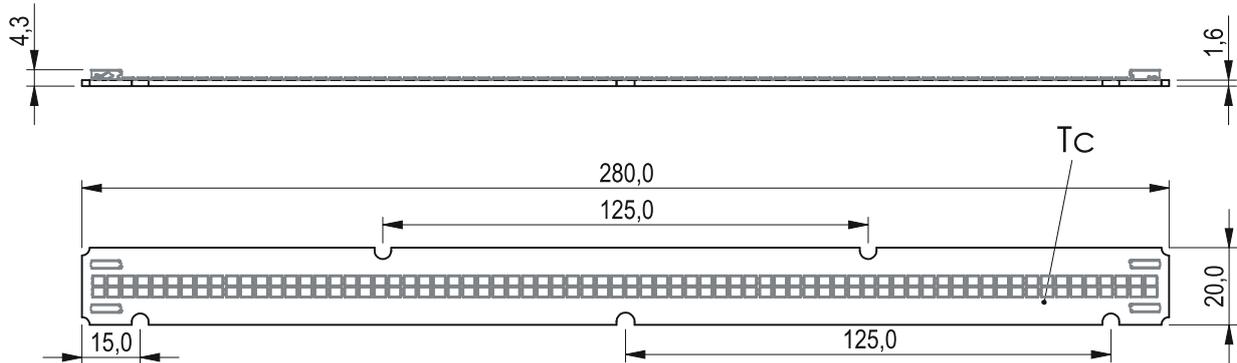

## Technical data

Nominal forward current	225 mA
Maximum forward current	1350 mA
Ambient temperature range	-25 ... +45 °C
tc	85 °C
tp rated	45 °C
Lumen maintenance L70B50	>102000h
Max. working voltage for insulation	400 V
Insulation test voltage	1800 V
Classification acc. to IEC 62031	Built-in
Risk group (IEC 62471)	RG1
Type of protection	IP00
Beam characteristic	120 °

## Product details

- Built-in LED module
- Long life-time
- Ideal for linear luminaires
- Perfectly uniform light
- SELV module
- Aluminium plate
- Dimension according to L28W2
- 5 years guarantee

# PLIN2 280x20mm CRI80 2000lm 225mA 4C U5

Product code	Photometric code	Useful luminous flux at tp=25 °C	Expected luminous flux at tp rated	Forward current	Min. forward voltage at tp=85 °C	Max. forward voltage at tp=25 °C	Power consumption at tp=25 °C	Efficacy at tp=25 °C	Expected efficacy at tp rated	Energy classification
A2820L144-840-225-4C-U5	840/359	2100 lm	2030 lm	225 mA	40,9 V	43,4 V	9,5 W	221 lm/W	216 lm/W	B
A2820L144-927-270-4C-U5	927/359	2015 lm	1960 lm	270 mA	41,3 V	43,8 V	11,6 W	174 lm/W	170 lm/W	C
A2820L144-930-270-4C-U5	930/359	2190 lm	2120 lm	270 mA	41,2 V	43,7 V	11,5 W	190 lm/W	186 lm/W	C
A2820L144-935-270-4C-U5	935/359	2300 lm	2230 lm	270 mA	41,1 V	43,6 V	11,5 W	200 lm/W	195 lm/W	B
A2820L144-940-270-4C-U5	940/359	2350 lm	2280 lm	270 mA	41,1 V	43,7 V	11,4 W	205 lm/W	200 lm/W	B
A2820L144-965-270-4C-U5	965/359	2260 lm	2190 lm	270 mA	41,0 V	43,5 V	11,5 W	196 lm/W	192 lm/W	C

Temperature multiplier		
Temperature	Expected luminous flux	Efficacy
tp 25 °C	1	1
tp 45 °C	0,96	0,97
tp 65 °C	0,93	0,94
tp 85 °C	0,89	0,91
Nominal current multiplier		
% of base nominal current	Expected luminous flux	Efficacy
20	0,19	0,95
40	0,39	0,96
60	0,59	0,97
80	0,80	0,97
100	1,00	0,97
120	1,20	0,97
140	1,40	0,97
160	1,60	0,97
180	1,80	0,97
200	2,00	0,96
220	2,19	0,96
240	2,39	0,96
260	2,59	0,96

## Thermal details

Temperature has a great influence on the lifetime of LED products. Exceeding the permissible temperatures can significantly shorten the life of the module or even lead to its destruction. It is necessary to verify compliance with the maximum allowable temperature at the reference point under stable operating conditions. The maximum value should be determined based on the application-specific worst-case conditions. Both reference point temperatures (tc and tp) are measured at the same location.

## Instalation

The module are not protected against overvoltages, overcurrents,overloads or short-circuit currents. Wrong polarity can damage the module. The module must be powered by a SELV or non-SELV constant current LED driver. Module can be mounted diectly on earthed metal parts of luminaire only when max working voltage for insulation is higher than max. output voltage of LED driver (also against earth). Otherwise additional insulation between LED module and heat sink is required. At voltages > 60 V an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed. This is typically achieved by means of a non removable light distributor over the module or by a suitable luminaire construction.




# PLIN2 280x20mm CRI80 2000lm 225mA 4C U5

## Risk of sulfurization


The LED uses a silver-plated lead frame and its surface color may change to black (or dark colored) when it is exposed to sulfur (S), chlorine (Cl) or other halogen compound. Sulfurization of lead frame may cause intensity degradation, change of chromaticity coordinates and, in extreme cases, open circuit. It requires caution. Due to possible sulfurization of lead frame, the LED Modules should not be used and stored together with oxidizing substances made of materials such as rubber, plain paper, lead solder cream, etc.

## Wiring example

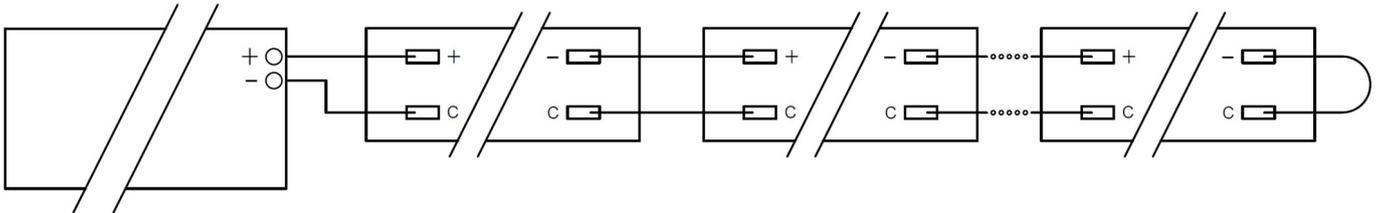

## Wiring type and cross section

The wiring can be in stranded wires or solid with a cross section of 0.2 to 0.75mm<sup>2</sup>.

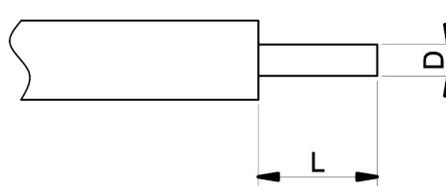

D - wire cross section	Min	Max
	0,2mm <sup>2</sup>	0,5mm <sup>2</sup>
L - strip length	Min	Max
	7,5mm	9,5mm

## Photometric code

1 digit	2+3 digit	4 digit	5 digit	6 digit
CRI	Colour temperature in Kelvin x 100	MacAdam initial	Mac Adam after 25 % of the lifetime ( max. 6000 h )	Luminous flux after 25% of the lifetime ( max. 6000 h )
7 70-79				7 ≥ 70
8 80-89				8 ≥ 80
9 ≥90				9 ≥ 90