


A2820L24

Drawing

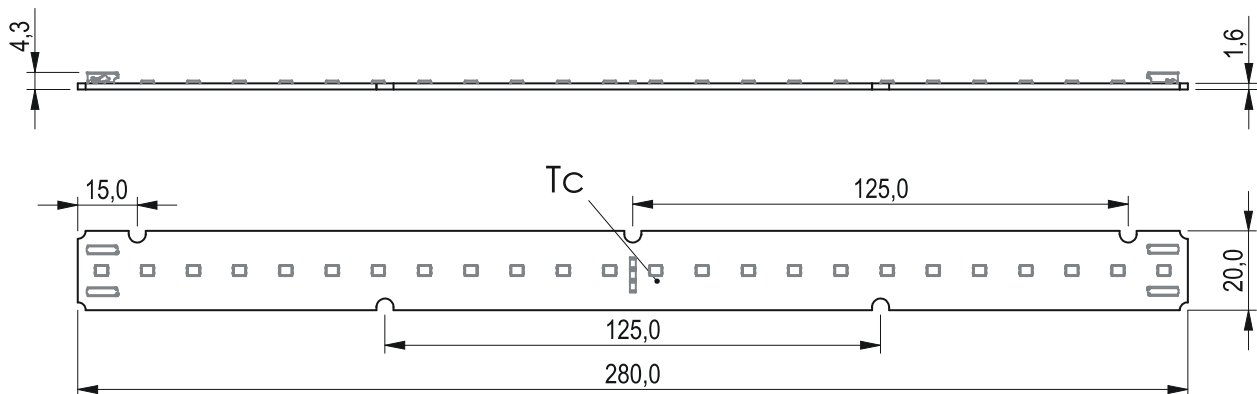

Technical data

Nominal forward current	350 / 700 mA
Maximum forward current	600 / 1200 mA
Ambient temperature range	-25 ... +45 °C
tc	85 °C
tp rated	45 °C
Lumen maintenance L80B10	60000h
Lumen maintenance L70B50	>72000h
Max. working voltage for insulation	400 V
Insulation test voltage	1800 V
Classification acc. to IEC 62031	Built-in
Risk group (IEC 62471)	RG1
Type of protection	IP00
Beam characteristic	120 °

Product details

- Built-in LED module
- Long life-time
- Ideal for linear luminaires
- Perfectly uniform light
- Dimmension according to L28W2
- 5 years guarantee

Product code	Photometric code	Useful luminous flux at tp=25 °C	Expected luminous flux at tp rated	Forward current	Min. forward voltage at tp=85 °C	Max. forward voltage at tp=25 °C	Power consumption at tp=25 °C	Efficacy at tp=25 °C	Expected efficacy of at tp rated	Energy classification
A2820L24-350-827	827/359	1330 lm	1280 lm	350 mA	21,8 V	23,2 V	7,9 W	167 lm/W	163 lm/W	D
A2820L24-350-830	830/359	1370 lm	1320 lm	350 mA	21,8 V	23,2 V	7,9 W	172 lm/W	167 lm/W	C
A2820L24-350-840	840/359	1430 lm	1370 lm	350 mA	21,8 V	23,2 V	7,9 W	180 lm/W	175 lm/W	C
A2820L24-350-850	857/359	1430 lm	1370 lm	350 mA	21,8 V	23,2 V	7,9 W	180 lm/W	175 lm/W	C
A2820L24-700-827	827/359	1330 lm	1280 lm	700 mA	10,9 V	11,6 V	7,9 W	167 lm/W	163 lm/W	D
A2820L24-700-830	830/359	1370 lm	1320 lm	700 mA	10,9 V	11,6 V	7,9 W	172 lm/W	167 lm/W	C
A2820L24-700-840	840/359	1430 lm	1370 lm	700 mA	10,9 V	11,6 V	7,9 W	180 lm/W	175 lm/W	C
A2820L24-700-850	857/359	1430 lm	1370 lm	700 mA	10,9 V	11,6 V	7,9 W	180 lm/W	175 lm/W	C



A2820L24

A2820L24-350-927	927/359	1110 lm	1070 lm	350 mA	22,2V	23,6 V	8,1 W	137 lm/W	133 lm/W	E
A2820L24-350-930	930/359	1130 lm	1100 lm	350 mA	22,2V	23,6 V	8,1 W	140 lm/W	137 lm/W	E
A2820L24-350-940	940/359	1190 lm	1150 lm	350 mA	22,2V	23,6 V	8,1 W	147 lm/W	143 lm/W	D
A2820L24-700-927	927/359	1110 lm	1070 lm	700 mA	11,1V	11,8 V	8,1 W	137 lm/W	133 lm/W	E
A2820L24-700-930	930/359	1130 lm	1100 lm	700 mA	11,1V	11,8 V	8,1 W	140 lm/W	137 lm/W	E
A2820L24-700-940	940/359	1190 lm	1150 lm	700 mA	11,1V	11,8 V	8,1 W	147 lm/W	143 lm/W	D

Multiplier	tp 25 °C	tp 45 °C	tp 65 °C	tp 85 °C	If 350 mA	If 400 mA	If 500 mA	If 600 mA
Expected luminous flux	1	0,96	0,93	0,89	1	1,13	1,40	1,67
Efficacy	1	0,97	0,94	0,91	1	0,98	0,96	0,93

Thermal details

Temperature has a great influence on the lifetime of LED products. Exceeding the permissible temperatures can significantly shorten the life of the module or even lead to its destruction. It is necessary to verify compliance with the maximum allowable temperature at the reference point under stable operating conditions. The maximum value should be determined based on the application-specific worst-case conditions. Both reference point temperatures (t_c and t_p) are measured at the same location.


Instalation

The module are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Wrong polarity can damage the module. The module must be powered by a SELV or non-SELV constant current LED driver. Module can be mounted diectly on earthed metal parts of luminaire only when max working voltage for insulation is higher than max. output voltage of LED driver (also against earth). Otherwise additional insulation between LED module and heat sink is required. At voltages > 60 V an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed. This is typically achieved by means of a non removable light distributor over the module or by a suitable luminaire construction.

Risk of sulfurization

The LED uses a silver-plated lead frame and its surface color may change to black (or dark colored) when it is exposed to sulfur (S), chlorine (Cl) or other halogen compound. Sulfurization of lead frame may cause intensity degradation, change of chromaticity coordinates and, in extreme cases, open circuit. It requires caution. Due to possible sulfurization of lead frame, the LED Modules should not be used and stored together with oxidizing substances made of materials such as rubber, plain paper, lead solder cream, etc.


Wiring example

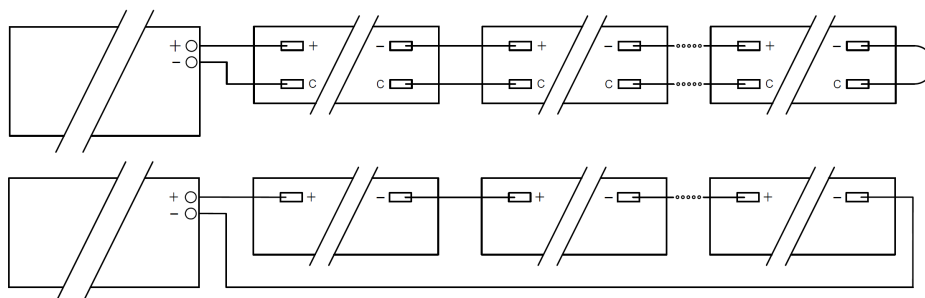

A2820L24

Wiring type and cross section

The wiring can be in stranded wires or solid with a cross section of 0.2 to 0.75mm².

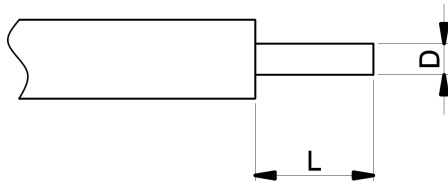

D - wire cross section	Min	Max
	0,2mm ²	0,75mm ²
L - strip length	Min	Max
	7,5mm	9,5mm

Photometric code

1 digit	2+3 digit	4 digit	5 digit	6 digit
CRI	Colour temperature in Kelvin x 100	MacAdam initial	Mac Adam after 25 % of the lifetime (max. 6000 h)	Luminous flux after 25% of the lifetime (max. 6000 h)
7 70-79				7 ≥ 70
8 80-89				8 ≥ 80
9 ≥90				9 ≥ 90